

HAND DRYERS

## GW01 14 04 01 Model WECflow brushed stainless steel

**GENWEC**<sup>®</sup>  
WASHROOM EQUIPMENT & COMP.



### Product description

Hot air hand dryer  
Operates by electronic sensor.  
Brushed AISI 304 stainless steel cover.  
Extremely tough  
3-year warranty

### Technical specifications:

The hot air hand dryer consists of a one-piece cover in AISI 304 stainless steel with a polycarbonate grille on the bottom end and a base, made in ABS plastic, that serves as support for the volute-nozzle made in flame-retardant thermoplastic. The base-casing assembly which makes up the hand dryer is fixed to the wall by means of 3 holes with the dimensions for an 8 mm drill bit. The dryer is operated by an electronic infra-red sensor, and it automatically stops after the hands have been withdrawn from the sensor field. The induction motor, located in the centre of the volute, rotates at 2800 r/min. The hand dryer delivers an airflow of 4000 l/min (240 m<sup>3</sup>/h) at a speed of 65 km/h. The air flows if the user continues to use it. The dryer has a total power rating of 1900W at 230V with a maximum consumption of 8.2A. The noise level at 2 meters is 60 dBA. The protection class against splashing is IPX1. The total measurements of the hot air hand dryer are 355x255x148 mm, and its total net weight is 3.2kg. The hand dryer model is GW01 14 04 01, manufactured by GENWEC WASHROOM S.L. - Av. Joan Carles I, 46-48 - ES 08908 L'Hospitalet de Llobregat - Barcelona (Spain). [www.genwec.com](http://www.genwec.com)

### Technical characteristics

#### Electrical specifications

Voltage/Frequency: 220-240 V 50/60 Hz  
Maximum intensity: 8.2 A  
Total power rating: 1900 W  
Heating element power rating: 1840 W  
Motor power rating: 60 W  
Motor type: Capacitor start induction  
Rotor speed: 2800 r/min  
Electrical insulation: Class I  
Protection class: IPX1  
Heating element thermally protected.  
(Automatic reset)

#### Mechanical specifications

Air flow: 4000 l/min (240 m<sup>3</sup>/h)  
Air speed: 65 km/h  
Noise level at 2m: 60 dBA  
Output air temperature at an ambient T. of 21° C: 65°C  
Outer cover type: AISI 304 Stainless steel  
Protective grill in polycarbonate  
Volute-nozzle made of flame-retardant thermoplastic.

#### Packaging specifications


- Type of individual package: Single cardboard box with expanded polystyrene and a plastic bag
- Dimensions of individual package: 275 x 190 x 360 mm
- Weight of individual package: 3,5 Kg
- Product dimensions: 355x255x153x148 mm
- Product weight: 3.20 kg
- Units per box: 4
- Units per pallet: 32 (\*)

(\*)Height below 1,1m.

GENWEC WASHROOM S.L. reserves the right to modify and/or rectify the products and their specifications without prior notice

Dimensions: ± 3%

Reviewed by: MG\_V4 (02/2023)

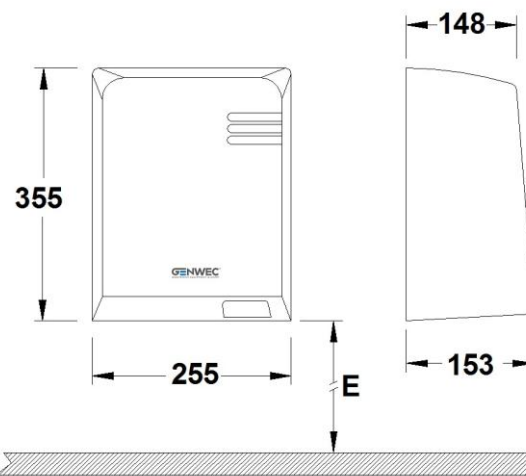

**Cleaning:** A cotton cloth slightly dampened in a soapy solution is recommended. Then dry off. Do not use any strong chemicals or cleaning agents that can be dangerous to children.